

HITACHI


Triple C R32

Chlazení, vytápění & ohřev TUV

Řešení klimatizace a TUV pro domácnosti a malé komerční aplikace



První multisplit na trhu zajišťující trojitý komfort: chlazení, vytápění a ohřev TUV

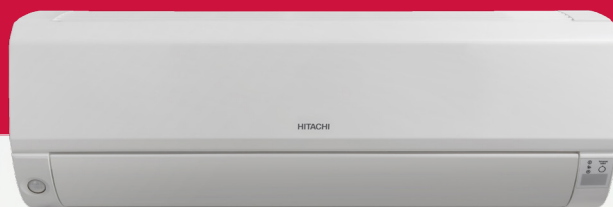

Cooling & Heating

Chlazení, vytápění a ohřev TUV



Triple C R32 Řešení pro trojitý komfort

3 in 1:
exclusive
on the
market

Co je nový Triple C R32?

Triple C R32 je první multisplitový systém na trhu, který poskytuje trojitý komfort: **chlazení, vytápění a ohřev teplé užitkové vody (TUV)** s použitím pouze jedné venkovní jednotky.


Systém kombinuje klimatizační jednotky pro chlazení a vytápění (1 až 4 vnitřní jednotky) a samostatný zásobník **Yutampo R32** pro výrobu teplé vody.

What are key benefits?

- Energetická spora
 - High seasonal performances: **SEER A++ / SCOP A++/A+**
 - High domestic hot water (DHW) performances: **A+ / A**
 - Increased energy savings with **Hibernate mode**: **70%** reduction of the stand by power consumption
- V soka rove komfortu
 - High heating capacity at low temperatures
 - Low sound level thanks to **Vector Control** technology applied on the compressor
 - Smart priority control for optimal cooling & heating or DHW mode
- le ibilita instalace
 - Ability to connect from 1 up to 4 indoor units to a single outdoor unit
 - Long piping length up to **25m** for easier installation
- Snadn ovládání
 - Compatible with **HiKumo App** (remote control) & **HiKumo PRO** (remote maintenance)
- ompatibilita s irokou paletou bytov ch klimatiza ních jednotek
 - Wall Hi-End, Wall Standard, Wall Light Commercial, Cassette, Duct, Floor


Where to install?

- **Refurbishment housing:**
 - **Triple C R32** can easily replace an electric heating system and a boiler with minimum installation work, providing a possibility to switch to the cooling mode in the summertime
 - Maximum heating capacity can reach up to **11,5kW**
- **New house buildings:**
 - Suitable for new buildings with high demand for energy efficiency and low capacities solutions with reduced installation space, **Triple C R32** can operate both in cooling & heating mode depending on weather conditions all year long

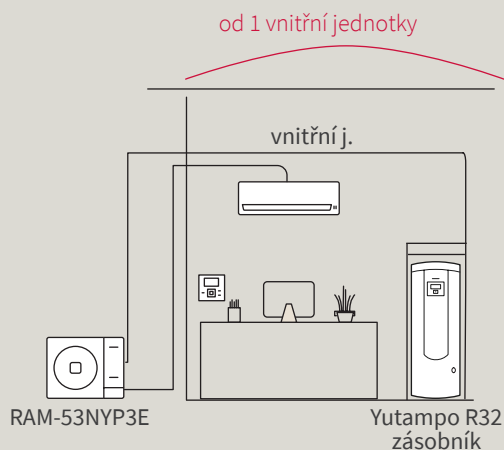

Instalace se zásobníkem Yutampo,
1 venkovní a 1 vnitřní jednotkou

po 4 vnitřní jednotky

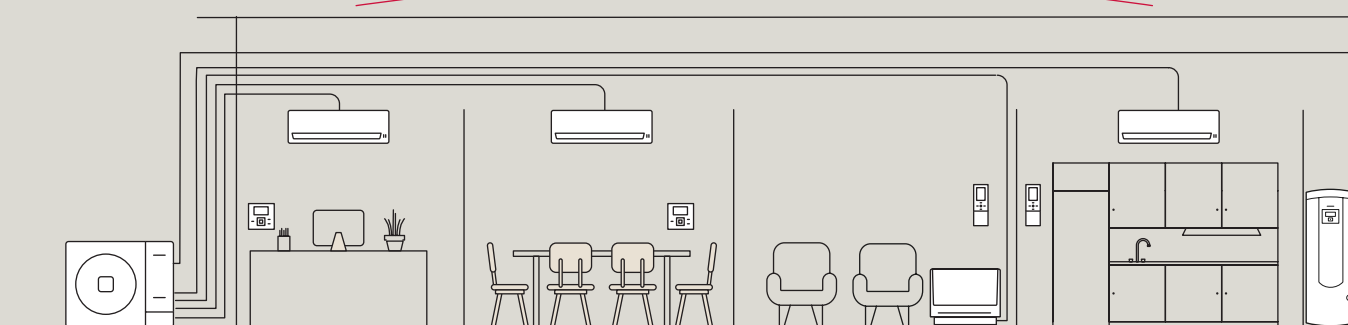

Instalace se zásobníkem Yutampo, 1 venkovní a 4 vnitřními jednotkami

Yutampo R32
zásobník

Triple C R32 Priority control

How does the **priority control** work?

Triple C R32 can operate both for cooling & heating and DHW production, and it is possible to choose a “**priority control**” depending on the needs of the application/installation. Thanks to the smart **priority control**, the user can choose whether to give the highest priority to **DHW production** or **cooling & heating** modes or to opt for a **balanced pattern** of both modes.

« **Fine tuning** » ensures a high level of comfort for both heating/cooling and Domestic Hot Water.



RAK-Q/RXE

RAF-RXE



A perfect choice for residential housing with a high demand of hot water.




A balanced system for replacing electric heating systems with more efficient air-to-air split units and air-to-water tank.



An ideal solution for small offices replacing old electric systems, given priority to air conditioning.



TAW-190RHC

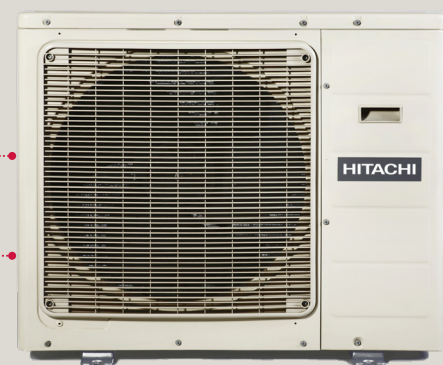

RAM-90NYP5E

Cooling, heating & domestic hot water solution




520



597

600



681



HiKumo App for easy
remote control



HiKumo PRO for easy
remote maintenance



Triple C R32 Installation & key features


Easy & flexible installation

Triple C R32 solution is easy and flexible to install thanks to its refrigerant piping capability, typical of a multi split system:

- Individual piping length between ODU and air-to-air IDUs can span from **3m min to 25m max**
- Height difference between an outdoor unit (ODU) and an indoor unit (IDU) can reach **up to 20m**
- Height difference between IDUs can be within **5m**
- Piping length between ODU and tank can span from **5m min up to 20m max**
- Height difference between ODU and tank can reach **up to 10m**

Total maximum piping length is:

- **60m** for RAM-53NYP3E and RAM-70NYP4E, **75m** for RAM-90NYP5E

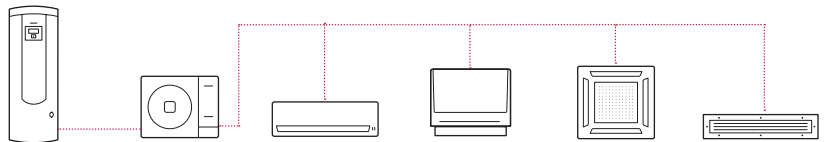

1. Tank

2. ODU

3. Wall

4. Floor

5. Cassette


6. Ducted

① Yutampo Tank


- **Compact** dimensions allow the tank to be installed in a standard cupboard
- Embedded **LCD Controller** allows to set easily water temperature and functions in multiple languages
- **Embedded electric heater** for additional heating capacity and anti-legionella protection
- **Active anode** (option) guarantees a reinforced tank protection
- Hidden refrigerant connections in the front panel to **improve aesthetics**



TAW-190RHC




TAW-270RHC



② Outdoor unit

- **High energy efficiency** both in cooling & heating (**A++/A++**) and DHW production (**A+**)
- **Low sound power level** (minimum **61 dBA**) thanks to Vector control
- Long total piping length (maximum 75m) and individual piping length (maximum 25m)
- **Energy savings** thanks to Hibernate mode: low power consumption in stand-by mode
- Connection from **1 up to 4 indoor units** and 1 tank
- **Compact** size & light weight






Triple C R32 system installed in a house

Indoor Units




③ Wall-mounted

- **Low noise operation**, sound pressure is only **19dBA**
- **Embedded Human sensor** provides additional energy savings when a room is empty
- **Indoor air quality** is guaranteed thanks to active carbon filters and mold clean function
- Homogeneous airflow distribution thanks to a **4-way swing function**
- IDU can be controlled remotely through **HiKumo smartphone app** by optional wireless gateway



④ Floor-standing

- Can be **suspended on a wall** for easier floor cleaning
- Effective airflow distribution in larger rooms thanks to **Extended Airflow function**
- Enhanced comfort provided thanks to **auto louver function** for optimum airflow distribution during cooling/heating operations
- **Optional gas leak sensor (SPX-RAFGLS)** to be installed in compliance with **EN-378** safety requirements
- Wireless gateway and **HiKumo** compatibility



⑤ Ducted

- **Hidden and discreet** indoor unit, ideal for various types of residential environment
- Middle static pressure (maximum **150Pa**) allows long duct to serve multiple rooms with one indoor unit only
- **Built-in drain pump** is included
- Air inlet can be installed on the rear or bottom of duct units to match different installations
- Compatibility with **AIRZONE controller** and Wireless gateway (**HiKumo app**)









* Cassette




- **600mm x 600mm** compact 4-way cassette, ideal for light commercial applications
- Individual louver control through wired remote control **SPX-WKT3**
- **Built-in human sensor** (ECO mode) available on the panel **P-AP56NAMS**
- Built-in drain pump is included
- Wireless gateway and **HiKumo** compatibility

*not displayed in the picture above

Triple C R32 Line-up

OUTDOOR UNIT			
	RAM-53NYP3E	RAM-70NYP4E	RAM-90NYP5E
	2 (Min.1)	3 (Min.2)	4 (Min. 2)
	5.3	6.8	8.5



INDOOR UNIT			
	Wall Hi-End RAK-Q/RXE	Wall Standard RAK-Q/RPE	Wall Light Commercial RAK-RPE (1)
	1.8~5.0	1.5~5.0	5.0~6.0
	Cooling cap. (kW)	Cooling cap. (kW)	Cooling cap. (kW)

INDOOR UNIT			
	Floor RAF-RXE	Duct RAD-Q/RPE	Cassette RAI-RPE
	2.5~5.0	1.8~6.0	2.5~6.0
	Cooling cap. (kW)	Cooling cap. (kW)	Cooling cap. (kW)

INDOOR UNIT (TANK)		
	TAW-190RHC	TAW-270RHC
	190	270
	Capacity (L)	Capacity (L)

Triple C R32 Controls & accessories

Air-to-air controls

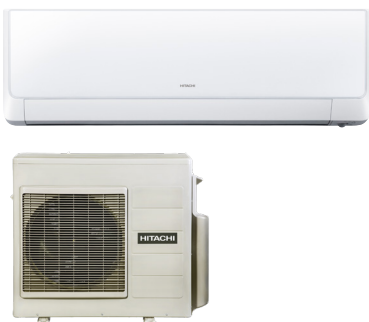

SPX-WKT3

- Weekly timer
- Info display: room temperature, power consumption, alarm code
- Temperature sensor embedded
- Temperature range limit

Wired controllers



SPX-RCDA / RCDB

- Simplified wired controller

Wireless controller



**SPX-RCKA1
(SPX-RCKA1 / 2 / 3)**

- Weekly timer
- Info display: room temperature, power consumption, alarm code


OR

H-LINK

CSNET **H-LINK**



H-link adapter
PSC-6RAD



HiKumo & HiKumo PRO



SPX-TAG01



AHP-SMB-01 Hi-Box




HiKumo App

Control your **Triple C R32** from your smartphone with **HiKumo App** and enjoy maintenance services with **HiKumo PRO** platform

Air-to-water controls

H-LINK



H-link adapter
ATW-HCD-01

H-LINK



HiKumo & HiKumo PRO



ATW-TAG-02 Gateway



AHP-SMB-01 Hi-Box



HiKumo App

Control your **Triple C R32** from your smartphone with **HiKumo App** and enjoy maintenance services with **HiKumo PRO** platform

*version 2.0 (Dec 2020)

Tank accessories



Optional function connector **ATW-OFC-02**

- Inputs & Outputs functions signal
- Opportunity to configure 3 inputs and 4 outputs (Smart action, DHW boost, Smart Grid, recirculation etc)



Active anode **ATW-CP-05**

- Reinforce protection of the tank with a cathodic protecton
- No maintenance required

Home automation/ BMS

Triple C R32 is compatible with **Modbus** and **KNX**



Triple C R32

Technical features

OUTDOOR UNIT (IN COMBINATION WITH AIR-TO-AIR INDOOR UNITS)	UNIT	RAM-53NYP3E	RAM-70NYP4E	RAM-90NYP5E
Minimum / Maximum indoor units connectable		1 / 2	2 / 3	2 / 4
Nominal Cooling capacity (min - max)*	kW	5.30 (1.50 - 6.60)	7.00 (1.50 - 8.80)	8.50 (1.50 - 9.50)
Nominal Heating capacity (min - max)*	kW	6.80 (1.50 - 7.20)	8.50 (1.50 - 9.50)	10.00 (1.50 - 11.50)
Nominal cooling power input (min - max)	kW	1.29 (0.46 - 2.96)	2.055 (0.46 - 3.20)	2.565 (0.50 - 3.85)
Nominal heating power input (min - max)	kW	1.61 (0.43 - 2.60)	2.02 (0.48 - 3.12)	2.56 (0.50 - 3.85)
EER / COP		4.10 / 4.20	3.41 / 4.20	3.31 / 3.90
SEER / SCOP *average climate	%	7.60 / 4.60	7.40 / 4.60	7.30 / 4.30
Energy class (SEER/SCOP)		A++ / A++	A++ / A++	A++ / A+
Noise level cooling (sound pressure)	dB(A)	50	50	52
Noise level heating (sound pressure)	dB(A)	51	53	56
Noise level - In/Out (sound power)	dB(A)	56 / 61	60 / 63	60 / 66
Dimensions (H x W x D)	mm	800 x 850 x 298		800 x 950 x 370
Net weight	kg	59	60	76
Power supply	V/Ph/Hz	220-240V / 1ph / 50/60Hz		
Recommended fuse size (circuit breaker)	A	20	20	25
Cable section (power)	mm ²	2.50 x 2 + EARTH		
Interconnection between indoor unit and outdoor unit	mm ²	1.50 x 3 + EARTH		
Piping diameter (Liq / Gas)	Inch	(1/4" x 3 / 3/8" x 3)	(1/4" x 4 / 3/8" x 3 + 1/2" x 1)	1/4" x 5 / (3/8" x 3) + (1/2" x 2)
Minimum piping length (each indoor)	m	3		
Maximum piping length / height difference	m	50 / 20	60 / 20	75 / 20
Current quantity of refrigerant	kg / TeqCO ²	2.05 / 1.384	2.05 / 1.384	2.40 / 1.620
Chargeless length / Additional refrigerant charge	m / g/m	30 / 20	30 / 20	35 / 15
Outdoor air temperature working range (cooling/ heating)	°C	-10°—46° / -15°—24°		
Refrigerant (GWP)	-	R32 / 675		
Condenser Fan		Propeller Fan		
Compressor	Type	2 Cylinder Rotary		

OUTDOOR UNIT (IN COMBINATION WITH A TANK)	UNIT	RAM-53NYP3E		RAM-70NYP4E		RAM-90NYP5E	
		TAW-190RHC	TAW-270RHC	TAW-190RHC	TAW-270RHC	TAW-190RHC	TAW-270RHC
Nominal Voume of the tank	L	190	270	190	270	190	270
Declared load profile	-	L	XL	L	XL	L	XL
Setting Temperature for the performance mesasurement	°C	53					
Reference hot water temperature (wh)	°C	52.6	52.8	52.6	52.8	52.6	52.8
COPt	-	3.1	3.2	3.1	3.2	2.72	2.9
Maximal volume of usable hot water (Vmax)	L	256	360	256	360	256	360
Standby power input (Pes)	W	26		27		29	
Heat-up time (Th)	hh:mm	02:20	03:10	02:20	03:10	02:10	02:45
Energy input during Heat-up time (Weh)	kWh	3.46	4.4	3.46	4.4	3.89	5.13
Thermal charge of the electrical heater	W/cm ²	7.37					
Rated pressure of the water tank	Mpa	0.7					
Unit Dimensions (H x W x D)	mm	1714 x 520 x 597	1714 x 600 x 681	1714 x 520 x 597	1714 x 600 x 681	1714 x 520 x 597	1714 x 600 x 681
Unit Weight	kg	53	62	53	62	53	62
Tank Corrossion Protection		"Magnesium Anode / Active Anode as accessory"					
Tank material		DUPLEX Stainless Steel					
Electric Heater Power	Kw	1.64					
Recommended fuse (or CB) size for Electrical Heater	A	10					
Electric Heater Power supply	V	220-230V					
Electric Heater Cable section	mm ²	1.50 x 2 + EARTH					
Interconnection between indoor unit and outdoor unit	mm ²	0.75 x 3 + EARTH					
Piping diameter (Liq / Gas)	Inch	1/4" / 3/8"					
Minimum piping length	m	5					
Maximum piping length / height difference	m	20 / 10					
Working range Outdoor Air Temperature (DHW)	°C	-15 ~ 37					
Water setting temperature (with E-Heater)	°C	30~55 (75)					
Minimum Maximum Water tank temperature	°C	5~75					
Indoor tank place temperature	°C	5 ~30					
Remote control (standard/optional)	Standard Optional	PC-ARFT1E					

Triple C R32

Technical features

WALL HI-END (RAK-Q/RXE)	UNIT	RAK-18QXE	RAK-25RXE	RAK-35RXE	RAK-50RXE
Noise level cooling (sound pressure (SL / L / M / H))	dB (A)	20/27/35/43	20/27/35/43	22/29/37/45	25/31/39/47
Noise level heating (sound pressure (SL / L / M / H))	dB (A)	20/28/36/43	20/28/36/43	22/30/37/45	25/31/39/48
Noise level (sound power)	dB (A)	58	58	60	60
Dimensions (H x W x D)	mm	295 x 900 x 210			
Wireless remocon		Included			
Wired remocon		Not included			

WALL STANDARD (RAK-Q/RPE)	UNIT	RAK-15QPE	RAK-18RPE	RAK-25RPE	RAK-35RPE	RAK-42RPE	RAK-50RPE
Noise level cooling (sound pressure (SL / L / M / H))	dB (A)	20/24/30/34	21/24/33/37	22/24/33/40	25/26/36/43	25/28/39 /46	25/28/39/46
Noise level heating (sound pressure (SL / L / M / H))	dB (A)	20/24/32/35	19/22/33/38	20/23/34/41	26/27/36/44	27/31/39 / 46	27/31/39/46
Noise level (sound power)	dB (A)	51	51	54	57	60	60
Dimensions (H x W x D)	mm	280 x 780 x 230					
Wireless remocon		Included					
Wired remocon		Not included					

WALL LIGHT COMMERCIAL RAK-RPE (1)	UNIT	RAK-50RPE1	RAK-60RPE
Noise level cooling (sound pressure (SL / L / M / H))	dB (A)	26/33/39/47	30/33/42/48
Noise level heating (sound pressure (SL / L / M / H))	dB (A)	26/33/39/47	33/34/42/49
Noise level (sound power)	dB (A)	60	60
Dimensions (H x W x D)	mm	300 x 900 x 230	
Wireless remocon		Not included	
Wired remocon		Not included	

FLOOR HI-END (RAF-RXE)	UNIT	RAF-25RXE	RAF-35RXE	RAF-50RXE
Noise level cooling (sound pressure (SL / L / M / H))	dB (A)	20/26/31/38	20/26/31/39	22/29/36/43
Noise level heating (sound pressure (SL / L / M / H))	dB (A)	20/26/31/38	20/26/31/39	22/29/36/44
Noise level (sound power)	dB (A)	52	53	57
Dimensions (H x W x D)	mm	750 x 590 x 215		
Wireless remocon		Included		
Wired remocon		Not included		

DUCT (RAD-Q/RPE)	UNIT	RAD-18QPE	RAD-25RPE	RAD-35RPE	RAD-50RPE	RAD-60RPE
Noise level cooling (sound pressure (SL / L / M / H))	dB (A)	29/31/34/36	30/33/37/41	30/33/37/41	29/32/35/39	29/32/35/39
Noise level heating (sound pressure (SL / L / M / H))	dB (A)	27/30/33/37	30/34/38/42	30/34/38/42	29/32/35/40	29/32/35/40
Noise level (sound power)	dB (A)	57			53	
Dimensions (H x W x D)	mm	235 x 750 x 400			270 x 900 x 720	
Wireless remocon		Not included				
Wired remocon		Not included				



Johnson Controls Hitachi Air Conditioning Europe S.A.S.

EUROPEAN PRODUCT DEVELOPMENT DEPARTMENT

2, Rue de Lombardie, Parc Aktiland II
69800 Saint Priest
FRANCE

hitachiaircon.com



The specifications of this catalog may change without prior notice to allow Hitachi Cooling & Heating to incorporate the latest innovations for its customers. The information contained in this catalog is merely informative. Hitachi Cooling & Heating declines any responsibility in the broadest sense, for damage, direct or indirect, arising from the use and / or interpretation of the recommendations in this catalog

Find the products Hitachi Cooling & Heating with the best service and conditions at your Hitachi Distributor.